

Item # \_\_\_\_\_ Job # \_\_\_\_\_

**WIRE SHELF STEM CASTER TRUCKS**

Provides high visibility and easy 4-way access. Ensures quick and efficient inventory control. Ideal for mobile storage requirements. Allows air to circulate throughout, eliminating dust and dirt build-up. Allows you to keep linens, food items, stocked products and other regularly used items on hand, throughout the workplace.

**TRUCK:** Consists of 4 posts, 4 wire shelves, plastic shelf clips, donut bumpers and 5" dia. swivel casters. Posts are 63"H. Overall truck height is 69". Casters are available in resilient rubber wheel stem casters that have an 800 lb. load capacity or polyurethane wheel stem casters that have a 1200 lb. load capacity or 8" full pneumatic stem casters with a 1200 lb. capacity.

**SHELVES:** Constructed of open wire design offering greater light penetration and visibility, lighter weight, air circulation and minimal dust and dirt accumulation.

**POSTS:** 1 in. O.D. round tubing, 16 gauge (0.062 in.) thickness. Rolled grooves spaced at 1 in. on centers along their length. The top of the post have a finished plastic cap and the post bottom have a die cast insert with adjustable leveling foot. At each rolled groove there are consecutive numbers starting at the bottom of the post to facilitate installation of clips.

**METHOD OF ASSEMBLY:** Frustal-Conical design incorporating a two part tapered plastic sleeve. Engagement and locking are accomplished with a protruding bead on the inner circumference of the plastic sleeve which will match the groove on the post. Two plastic sleeves attach to each corner post for each shelf. Both the sleeves and the corner fitting of the shelves have the identical taper to create a wedge effect, thereby locking the shelf securely in a rigid position. No screws or other fittings are required for assembly. Shelves vertically adjust on 1 in. increments.

**FINISHES:** Shelves and Posts are available in four finishes:

(A) **POLY-Z-BRITE:** Clear epoxy power coat electrostatically applied over brite zinc-chromate electro plating.

(B) **CHROME:** Brite, high gloss chrome over nickel electro plating.

(C) **NEXELON:** Blue metallic epoxy powder coat electrostatically applied over zinc-chromate electro plating and chemical conversion under coat.

(D) **STAINLESS STEEL:** Type 304 electropolished high gloss finish.



## STEM CASTER



**POLYURETHANE SWIVEL**

1 1/4" x 5"  
300 Lb. Capacity



**PNEUMATIC SWIVEL**

2 1/2" x 8"  
300 Lb. Capacity



**RUBBER SWIVEL**

1 1/4" x 5"  
200 Lb. Capacity

**Note:** Load capacity ratings are per caster. All Stem casters include donut bumpers.



**NEXEL INDUSTRIES INC.**  
11 Harbor Park Drive  
Port Washington, NY 11050  
U.S.A

1-800-245-6682

NY: 1-516-484-5225

FAX: 1-516-625-0084

E-mail: [nexelinfo@nexelwire.com](mailto:nexelinfo@nexelwire.com)

[www.nexelwire.com](http://www.nexelwire.com)



# WIRE SHELF STEM CASTER TRUCKS



**WIRE SHELF STEM CASTER TRUCKS**

Item # \_\_\_\_\_ Job # \_\_\_\_\_

<b>POLYFLORITE</b>				
Size W" x L"	Rubber Wheel Casters Model No.	Polyurethane Wheel Casters Model No.	Pneumatic Wheel Casters Model No.	Weight Lbs.
18 x 36	<b>C1836RZ</b>	<b>C1836PZ</b>	<b>C1836NZ</b>	62
18 x 48	<b>C1848RZ</b>	<b>C1848PZ</b>	<b>C1848NZ</b>	72
18 x 60	<b>C1860RZ</b>	<b>C1860PZ</b>	<b>C1860NZ</b>	92
21 x 36	<b>C2136RZ</b>	<b>C2136PZ</b>	<b>C2136NZ</b>	68
21 x 48	<b>C2148RZ</b>	<b>C2148PZ</b>	<b>C2148NZ</b>	80
21 x 60	<b>C2160RZ</b>	<b>C2160PZ</b>	<b>C2160NZ</b>	96
24 x 36	<b>C2436RZ</b>	<b>C2436PZ</b>	<b>C2436NZ</b>	76
24 x 48	<b>C2448RZ</b>	<b>C2448PZ</b>	<b>C2448NZ</b>	88
24 x 60	<b>C2460RZ</b>	<b>C2460PZ</b>	<b>C2460NZ</b>	108



<b>CHROME</b>				
Size W" x L"	Rubber Wheel Casters Model No.	Polyurethane Wheel Casters Model No.	Pneumatic Wheel Casters Model No.	Weight Lbs.
18 x 36	<b>C1836RC</b>	<b>C1836PC</b>	<b>C1836NC</b>	62
18 x 48	<b>C1848RC</b>	<b>C1848PC</b>	<b>C1848NC</b>	72
18 x 60	<b>C1860RC</b>	<b>C1860PC</b>	<b>C1860NC</b>	92
21 x 36	<b>C2136RC</b>	<b>C2136PC</b>	<b>C2136NC</b>	68
21 x 48	<b>C2148RC</b>	<b>C2148PC</b>	<b>C2148NC</b>	80
21 x 60	<b>C2160RC</b>	<b>C2160PC</b>	<b>C2160NC</b>	96
24 x 36	<b>C2436RC</b>	<b>C2436PC</b>	<b>C2436NC</b>	76
24 x 48	<b>C2448RC</b>	<b>C2448PC</b>	<b>C2448NC</b>	88
24 x 60	<b>C2460RC</b>	<b>C2460PC</b>	<b>C2460NC</b>	108


**SHELF DIVIDERS**

Size"	Model No.
14	<b>AD814C</b>
18	<b>AD818C</b>
21	<b>AD821C</b>
24	<b>AD824C</b>

**LEDGES**

Size"	Model No.
14	<b>AL414C</b>
18	<b>AL418C</b>
21	<b>AL421C</b>
24	<b>AL424C</b>
30	<b>AL430C</b>
36	<b>AL436C</b>
42	<b>AL442C</b>
48	<b>AL448C</b>
54	<b>AL454C</b>
60	<b>AL460C</b>
72	<b>AL472C</b>

<b>NEXELON</b>				
Size W" x L"	Rubber Wheel Casters Model No.	Polyurethane Wheel Casters Model No.	Pneumatic Wheel Casters Model No.	Weight Lbs.
18 x 36	<b>C1836RN</b>	<b>C1836PN</b>	<b>C1836NN</b>	62
18 x 48	<b>C1848RN</b>	<b>C1848PN</b>	<b>C1848NN</b>	72
18 x 60	<b>C1860RN</b>	<b>C1860PN</b>	<b>C1860NN</b>	92
21 x 36	<b>C2136RN</b>	<b>C2136PN</b>	<b>C2136NN</b>	68
21 x 48	<b>C2148RN</b>	<b>C2148PN</b>	<b>C2148NN</b>	80
21 x 60	<b>C2160RN</b>	<b>C2160PN</b>	<b>C2160NN</b>	96
24 x 36	<b>C2436RN</b>	<b>C2436PN</b>	<b>C2436NN</b>	76
24 x 48	<b>C2448RN</b>	<b>C2448PN</b>	<b>C2448NN</b>	88
24 x 60	<b>C2460RN</b>	<b>C2460PN</b>	<b>C2460NN</b>	108

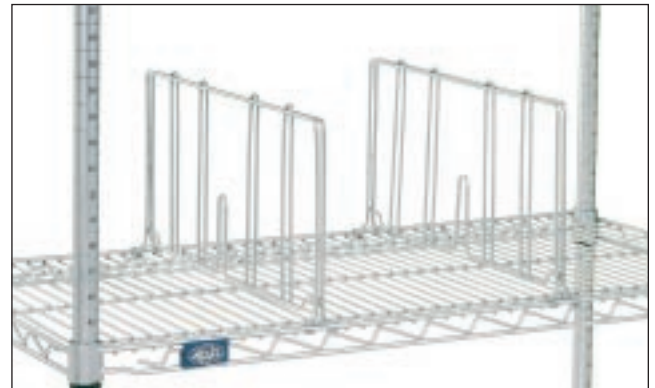

**NOTE:** Locking post collars are recommended for rough use over the road vibration and jolting. Order one per shelf. Part No. APL.

<b>STAINLESS STEEL</b>				
Size W" x L"	Rubber Wheel Casters Model No.	Polyurethane Wheel Casters Model No.	Pneumatic Wheel Casters Model No.	Weight Lbs.
18 x 36	<b>C1836RS</b>	<b>C1836PS</b>	<b>C1836NS</b>	62
18 x 48	<b>C1848RS</b>	<b>C1848PS</b>	<b>C1848NS</b>	72
24 x 36	<b>C2436RS</b>	<b>C2436PS</b>	<b>C2436NS</b>	76
24 x 48	<b>C2448RS</b>	<b>C2448PS</b>	<b>C2448NS</b>	88

**NOTE:** If rigid or brake style casters are required for your application, order a starter shelving unit and casters separately. To order shelving units, see spec sheet 100 or Nexel Catalog.

## OPTIONAL CASTER SETS

Description: Resilient Rubber Wheel, 1 1/4" x 5", 200 lb. capacity.

Type	Model No.
Swivel (Set of 4)	<b>CA5S4R</b>
Swivel w/Brake (Set of 4)	<b>CA5BR4</b>
Swivel 2 w/Brake (Set of 4)	<b>CA5SBR</b>

Description: Polyurethane Wheel, 1 1/4" x 5", 300 lb. capacity.

Type	Model No.
Swivel (Set of 4)	<b>CA5S4</b>
Swivel w/Brake (Set of 4)	<b>CA5BP4</b>
Swivel, 2 w/Brake (Set of 4)	<b>CA5SB</b>
Swivel, 2 w/Brake, 2 Rigid (Set of 4)	<b>CA5RSB*</b>
Stainless Steel, Swivel, 2 w/Brake (Set of 4)	<b>CA5SBS</b>

Description: Pneumatic Wheel, 2.5" x 8", 300 lb. capacity.

Type	Model No.
2 Swivel, 2 Rigid (Set of 4)	<b>CA85RN*</b>

\*Tie Bar required